




## Filtered MIL-DTL-38999 Connector Part Number Builder

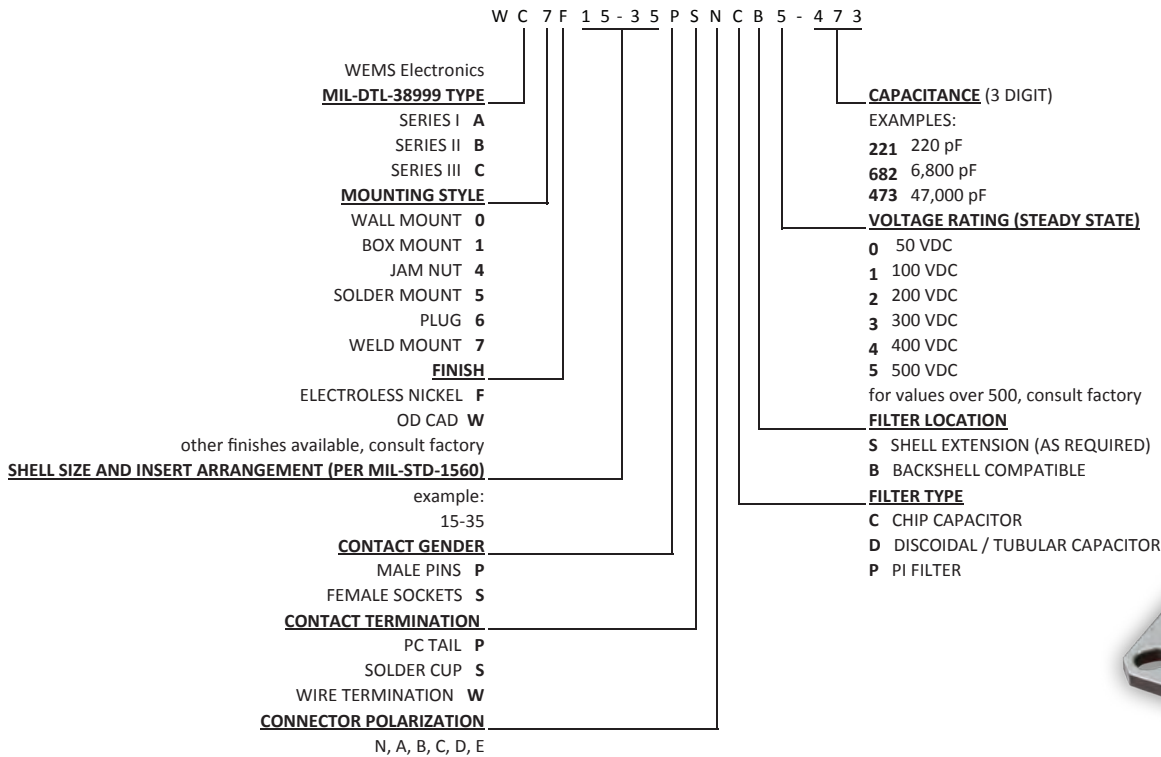

**CAPACITANCE** (3 DIGIT)

EXAMPLES:  
**221** 220 pF  
**682** 6,800 pF  
**473** 47,000 pF

**VOLTAGE RATING (STEADY STATE)**

**0** 50 VDC  
**1** 100 VDC  
**2** 200 VDC  
**3** 300 VDC  
**4** 400 VDC  
**5** 500 VDC

for values over 500, consult factory

**FILTER LOCATION**


**S** SHELL EXTENSION (AS REQUIRED)  
**B** BACKSHELL COMPATIBLE

**FILTER TYPE**

**C** CHIP CAPACITOR  
**D** DISCOIDAL / TUBULAR CAPACITOR  
**P** PI FILTER



## Filtered MIL-DTL-26482 Connector Part Number Builder

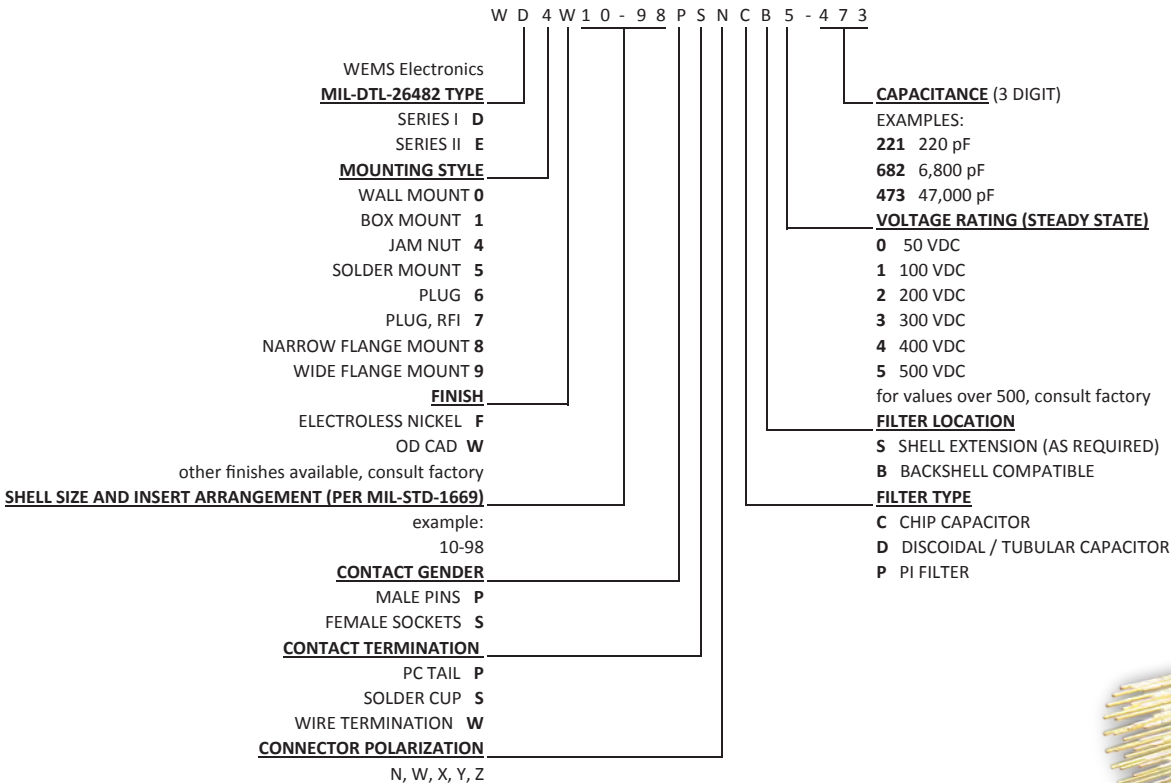

**CAPACITANCE** (3 DIGIT)

EXAMPLES:  
**221** 220 pF  
**682** 6,800 pF  
**473** 47,000 pF

**VOLTAGE RATING (STEADY STATE)**

**0** 50 VDC  
**1** 100 VDC  
**2** 200 VDC  
**3** 300 VDC  
**4** 400 VDC  
**5** 500 VDC

for values over 500, consult factory

**FILTER LOCATION**

**S** SHELL EXTENSION (AS REQUIRED)  
**B** BACKSHELL COMPATIBLE

**FILTER TYPE**

**C** CHIP CAPACITOR  
**D** DISCOIDAL / TUBULAR CAPACITOR  
**P** PI FILTER

